

S-ENERGY

High-efficiency photovoltaic module using silicon nitride polycrystalline cells.

SM-XXXPA8 Series

245 ~ 195Watt Photovoltaic Module

Performance

Rated power (Pmax)	245~195W
Power tolerance	± 3%
Nominal voltage	24V
Limited Warranty	30 years



Electrical Characteristics

Model	245PA8	240PA8	235PA8	230PA8	225PA8	220PA8	215PA8	210PA8	205PA8	200PA8	195PA8
Maximum power (Pmax)	245W	240W	235W	230W	225W	220W	215W	210W	205W	200W	195W
Voltage at Pmax (Vmp)	30.1V	29.8V	29.6V	29.4V	29.2V	28.9V	28.4V	27.7V	26.4V	26.1V	25.6V
Current at Pmax (Imp)	8.14A	8.08A	7.95A	7.84A	7.72A	7.62A	7.57A	7.89A	7.78A	7.67A	7.57A
Warranted minimum Pmax	237W	232W	227W	223W	218W	213W	208W	198W	198W	194W	189W
Short-circuit current (Isc)	8.67A	8.63A	8.56A	8.45A	8.34A	8.24A	8.20A	8.51A	8.39A	8.29A	8.20A
Open-circuit voltage (Voc)	37.5V	37.4V	37.1V	36.9V	36.7V	36.3V	36.1V	33.3V	33.1V	32.8V	32.5V
Temperature coefficient of Isc	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C	0.04%/°C
Temperature coefficient of Voc	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C	-0.32%/°C
Temperature coefficient of power	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C	-0.35%/°C
NOCT (Air 20°C; Sun 0.8kW/C; Wind 1m/s)	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C	47±2°C
Maximum series fuse rating	10A	10A	10A	10A	10A	10A	10A	10A	10A	10A	10A
Maximum system voltage	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V	1000V
Module efficiency	15.43%	15.12%	14.80%	14.49%	14.17%	13.86%	13.54%	14.68%	14.33%	13.98%	13.63%
Dimensions	1620mm x 980mm Depth:50mm						1460mm x 980mm Depth:50mm				
Weight	19Kg						18Kg				
Solar cells	60 cells (6 x 10 matrix)						54 cells (6 x 9 matrix)				

Mechanical Characteristics

Frame	Static load : 8,000Pa (816Kg/m ²) ; Color: Silver/Black ; Anodizing thickness 16μm
Output Cables	RHW-2, 12AWG (4mm ²) cable with polarized weatherproof DC rated connectors; Cable length-1000mm (+ -)
Construction	Front : High-transmission 3.2mm low iron tempered glass; White back sheet; Encapsulant; EVA


- Warrant : Power output for 30 years (90% of minimum output power per 10 years, 80% of minimum output power per 30 years).
Freedom from defects in materials and workmanship for 10 years.
- These data represent the performance of typical SM-XXXPA8 Series products, and are based on measurements made in accordance with ASTM E1038 corrected to SRC (STC)

Quality Assurance

S-Energy photovoltaic modules have passed the following tests.

Thermal shock / cycling test	Mechanical loading test
UV preconditioning test	Hot-spot endurance test
Humidity - Freeze test	Water proof test
Electrical insulation test	Outdoor exposure test
Damp-heat test	Hail impact test

Irradiance coefficient

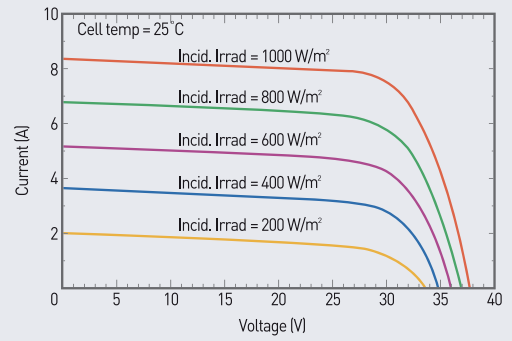


Qualification Test Parameters


Tests are proceeded by IEC 61215 standard.

Thermal cycling range	-40°C to +85°C
Humidity freeze, damp heat	85% RH
Static load front and back	8,000Pa (816Kg/m²)
Hailstone impact	25mm at 23 m/s
STC	1000W/m² ; 25°C ; AM 1.5


Temperature coefficient

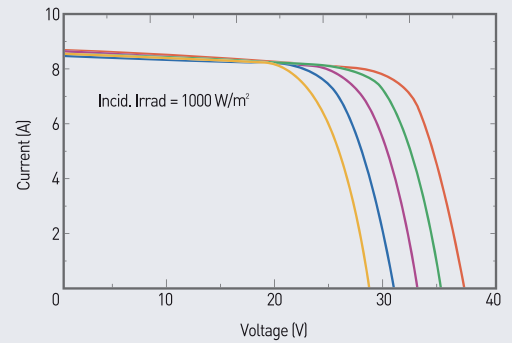

Module Diagram

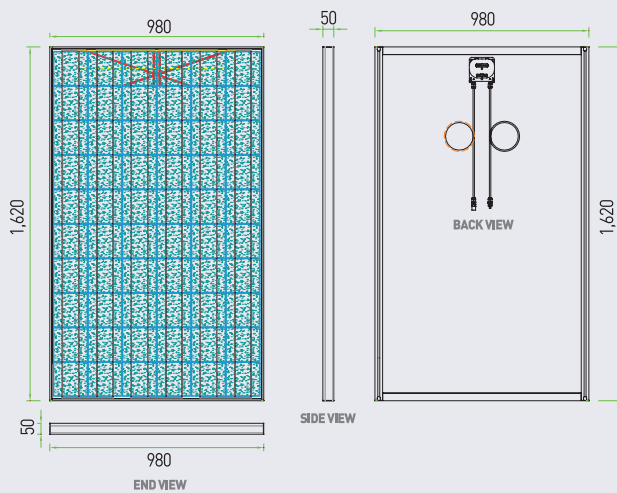

Module : SM-245PA8, SM-240PA8, SM-235PA8, SM-230PA8,
SM-225PA8, SM-220PA8, SM-215PA8

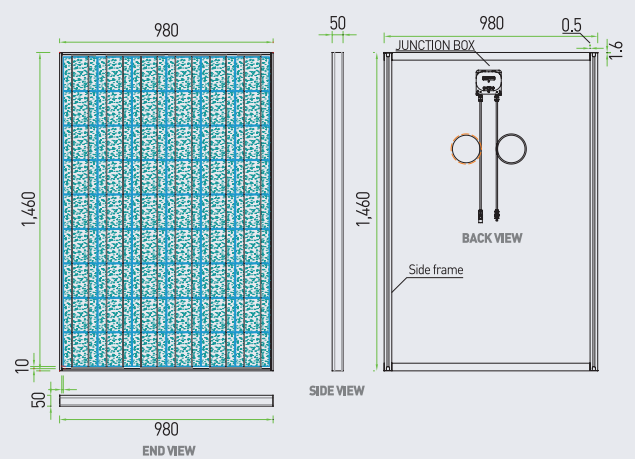

Module : SM-210PA8, SM-205PA8, SM-200PA8,
SM-195PA8

NOTE : This publication summarizes product warranty and specification, which are subject to change without notice



S-ENERGY

E-mail : inquiry@s-energy.co.kr

TEL : +82-2-801-7100 / FAX : +82-2-801-8788

Address: 10th Fl, E&C Venture Dream Tower VI, 197-28 Guro-dong, Guro-gu, Seoul, Korea